


Wir fertigen für Sie.

www.WiCo-Dichtungen.de



# TESNIT® BA-203



TESNIT® BA-203 is designed for less demanding applications particularly for shipbuilding.  
TESNIT® BA-203 also has good thermal resistance.

## PROPERTIES

SUPERIOR			
EXCELENT			
VERY GOOD			
GOOD	MECHANICAL RESISTANCE	THERMAL RESISTANCE	CHEMICAL RESISTANCE
MODERATE	■	■	■

## APPROPRIATE INDUSTRIES & APPLICATIONS

- GENERAL PURPOSE
- WATER SUPPLY
- SHIPBUILDING

Composition	Aramid fibres, inorganic fillers, NBR binder. Optional steel wire mesh insert on request.
Colour	Yellow
Approvals	Germanischer Lloyd


## TECHNICAL DATA

 Typical values for a thickness of 2 mm

<b>Density</b>	DIN 28090-2	g/cm <sup>3</sup>	1.8
<b>Compressibility</b>	ASTM F36J	%	10
<b>Recovery</b>	ASTM F36J	%	60
<b>Tensile strengthx</b>	ASTM F152	MPa	8
<b>Stress resistance</b>	DIN 52913		
16 h, 50 MPa, 175 °C		MPa	25
16 h, 50 MPa, 300 °C		MPa	/
<b>Specific leak rate</b>	DIN 3535-6	mg/(l·s·m)	0.08
<b>Thickness increase</b>	ASTM F146		
Oil IRM 903, 5 h, 150 °C		%	8
ASTM Fuel B, 5 h, 23 °C		%	10
<b>Compression modulus</b>	DIN 28090-2		
At room temperature: $\epsilon_{KSW}$		%	/
At elevated temperature: $\epsilon_{WSW/200\text{ °C}}$		%	/
<b>Percentage creep relaxation</b>	DIN 28090-2		
At room temperature: $\epsilon_{KRW}$		%	/
At elevated temperature: $\epsilon_{WRW/200\text{ °C}}$		%	/
<b>Max. operating conditions</b>			
Peak temperature		°C/°F	250/482
Continuous temperature		°C/°F	200/392
- with steam		°C/°F	160/320
Pressure		bar/psi	50/725

## P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

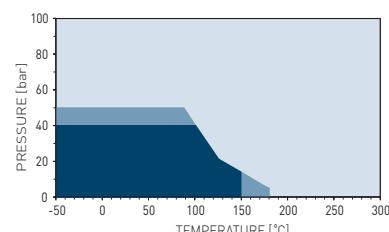

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.


Surface finish	Surface finish is 2AS. Optional graphite or PTFE finish on request.
Dimensions of standard sheets	Sheet size [mm]: 1500 x 1500   3000 x 1500   4500 x 1500 Thickness [mm]: 0.5   1.0   1.5   2.0   3.0 Other dimensions and thicknesses are available on request.
Tolerances	± 5 % on length and width On thickness up to 1.0 mm ± 0.1 mm On thickness above 1.0 mm ± 10 %

Acetamide	+	Dioxane	-	Oleic acid	+
Acetic acid, 10%	+	Diphyl (Dowtherm A)	+	Oleum [Sulfuric acid, fuming]	-
Acetic acid, 100% (Glacial)	-	Esters	?	Oxalic acid	?
Acetone	?	Ethane [gas]	+	Oxygen [gas]	-
Acetonitrile	-	Ethers	?	Palmitic acid	+
Acetylene [gas]	+	Ethyl acetate	?	Paraffin oil	+
Acid chlorides	-	Ethyl alcohol [Ethanol]	+	Pentane	+
Acrylic acid	?	Ethyl cellulose	?	Perchloroethylene	-
Acrylonitrile	-	Ethyl chloride [gas]	-	Petroleum [Crude oil]	+
Adipic acid	+	Ethylene [gas]	+	Phenol [Carbolic acid]	-
Air [gas]	+	Ethylene glycol	+	Phosphoric acid, 40%	?
Alcohols	+	Formaldehyde [Formalin]	?	Phosphoric acid, 85%	-
Aldehydes	?	Formamide	?	Phthalic acid	+
Alum	+	Formic acid, 10%	+	Potassium acetate	+
Aluminium acetate	+	Formic acid, 85%	?	Potassium bicarbonate	+
Aluminium chlorate	?	Formic acid, 100%	-	Potassium carbonate	+
Aluminium chloride	?	Freon-12 [R-12]	+	Potassium chloride	+
Aluminium sulfate	?	Freon-134a [R-134a]	+	Potassium cyanide	+
Amines	-	Freon-22 [R-22]	?	Potassium dichromate	?
Ammonia [gas]	?	Fruit juices	+	Potassium hydroxide	?
Ammonium bicarbonate	+	Fuel oil	+	Potassium iodide	+
Ammonium chloride	+	Gasoline	+	Potassium nitrate	+
Ammonium hydroxide	+	Gelatin	+	Potassium permanganate	?
Amyl acetate	?	Glycerine [Glycerol]	+	Propane [gas]	+
Anhydrides	?	Glycols	+	Propylene [gas]	+
Aniline	-	Helium [gas]	+	Pyridine	-
Anisole	?	Heptane	+	Salicylic acid	?
Argon [gas]	+	Hydraulic oil [Glycol based]	+	Seawater/brine	+
Asphalt	+	Hydraulic oil [Mineral type]	?	Silicones [oil/grease]	+
Barium chloride	+	Hydraulic oil [Phosphate ester based]	?	Soaps	+
Benzaldehyde	-	Hydrazine	-	Sodium aluminate	+
Benzene	+	Hydrocarbons	+	Sodium bicarbonate	+
Benzoic acid	?	Hydrochloric acid, 10%	?	Sodium bisulfite	+
Bio-diesel	+	Hydrochloric acid, 37%	-	Sodium carbonate	+
Bio-ethanol	+	Hydrofluoric acid, 10%	-	Sodium chloride	+
Black liquor	?	Hydrofluoric acid, 48%	-	Sodium cyanide	+
Borax	+	Hydrogen [gas]	+	Sodium hydroxide	?
Boric acid	+	Iron sulfate	+	Sodium hypochlorite [Bleach]	?
Butadiene [gas]	+	Isobutane [gas]	+	Sodium silicate [Water glass]	+
Butane [gas]	+	Isooctane	+	Sodium sulfate	+
Butyl alcohol [Butanol]	+	Isoprene	+	Sodium sulfide	+
Butyric acid	+	Isopropyl alcohol [Isopropanol]	+	Starch	+
Calcium chloride	+	Kerosene	+	Steam	+
Calcium hydroxide	+	Ketones	?	Stearic acid	+
Carbon dioxide [gas]	+	Lactic acid	?	Styrene	?
Carbon monoxide [gas]	+	Lead acetate	+	Sugars	+
Cellosolve	?	Lead arsenate	+	Sulfur	?
Chlorine [gas]	-	Magnesium sulfate	+	Sulfur dioxide [gas]	?
Chlorine [in water]	-	Maleic acid	?	Sulfuric acid, 20%	-
Chlorobenzene	?	Malic acid	?	Sulfuric acid, 98%	-
Chloroform	-	Methane [gas]	+	Sulfuryl chloride	-
Chloroprene	?	Methyl alcohol [Methanol]	+	Tar	+
Chlorosilanes	-	Methyl chloride [gas]	?	Tartaric acid	?
Chromic acid	-	Methylene dichloride	?	Tetrahydrofuran (THF)	-
Citric acid	?	Methyl ethyl ketone (MEK)	?	Titanium tetrachloride	-
Copper acetate	+	N-Methyl-pyrrolidone (NMP)	?	Toluene	+
Copper sulfate	+	Milk	+	2,4-Toluenediisocyanate	?
Creosote	?	Mineral oil [ASTM no.1]	+	Transformer oil [Mineral type]	+
Cresols [Cresylic acid]	-	Motor oil	+	Trichloroethylene	-
Cyclohexane	+	Naphtha	+	Vinegar	+
Cyclohexanol	+	Nitric acid, 10%	-	Vinyl chloride [gas]	-
Cyclohexanone	?	Nitric acid, 65%	-	Vinylidene chloride	-
Decalin	+	Nitrobenzene	-	Water	+
Dextrin	+	Nitrogen [gas]	+	White spirits	+
Dibenzyl ether	?	Nitrous gases (NOx)	?	Xlenes	+
Dibutyl phthalate	?	Octane	+	Xylenol	-
Dimethylacetamide (DMA)	?	Oils [Essential]	+	Zinc sulfate	+
Dimethylformamide (DMF)	?	Oils [Vegetable]	+		

All information and data quoted are based upon years of experience in the production and operation of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.

## σ<sub>BO</sub> DIAGRAM

DIN 28090-1

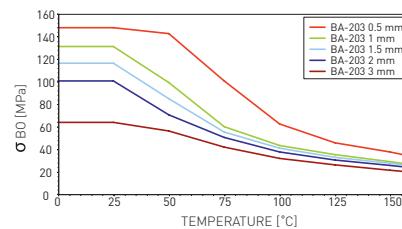

σ<sub>BO</sub> diagrams represent σ<sub>BO</sub> values for different gasket material thicknesses. These values indicate the maximum in-service compressive pressures which can be applied on the compressed gasket area in-service without destroying the gasket material.

**P-T diagrams** indicate the maximum allowed combination of internal pressure and service temperature which can be applied simultaneously for a given gasket depending on its material type, thickness, size and tightness class. Given the variety of gasket applications and service conditions, these values should only be regarded as guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

## CHEMICAL RESISTANCE CHART

The recommendations made here are intended to be a guideline for the selection of the suitable gasket quality. Because the function and durability of the products depend upon a number of factors, the data may not be used to support any warranty claims.

⊕ Recommended

⊕ Recommendation depends on operating conditions

- Not recommended



DONIT TESNIT®, d.o.o.

Cesta komandanta Staneta 38  
1215 Medvode, Slovenia

Phone: +386 (0)1 582 33 00

Fax: +386 (0)1 582 32 06

+386 (0)1 582 32 08

Web: www.donit.eu

E-mail: info@donit.eu

Copyright © 2015 DONIT TESNIT, d.o.o.

All rights reserved

Date of issue: 01.06.2015 / TDS-BA203-05-2015