

TESNIT® BA-GL combines excellent thermal and chemical resistance with outstanding mechanical properties, especially bolt torque retention. Thus, TESNIT® BA-GL is particularly suited for gas and steam supplies, heating systems, pumps and compressors.



## PROPERTIES

	MECHANICAL RESISTANCE	THERMAL RESISTANCE	CHEMICAL RESISTANCE
SUPERIOR			
EXCELLENT			
VERY GOOD			
GOOD			
MODERATE			

## APPROPRIATE INDUSTRIES & APPLICATIONS

	POTABLE WATER SUPPLY
	POWER PLANT
	STEAM SUPPLY
	REFRIGERATION AND COOLING
	GAS SUPPLY
	HEATING SYSTEMS
	PETROCHEMICAL INDUSTRY
	HIGH TEMP. APPLICATIONS
	FOOD INDUSTRY
	COMPRESSORS AND PUMPS
	SHIPBUILDING
	VALVES

## Composition

Glass fibres, aramid fibres, inorganic fillers, NBR binder.  
Optional steel wire mesh or expanded steel insert on request.

## Colour

Green

## Approvals

DIN-DVGW DIN 3535-6, DVGW VP 401, DVGW KTW, BAM (Oxygen), TA-Luft (VDI 2440), API 607, Germanischer Lloyd, WRAS, EC 1935/2004, BS 7531 Grade X


## TECHNICAL DATA

Typical values for a thickness of 2 mm

<b>Density</b>	DIN 28090-2	g/cm <sup>3</sup>	1.8
<b>Compressibility</b>	ASTM F36J	%	7
<b>Recovery</b>	ASTM F36J	%	55
<b>Tensile strengthx</b>	ASTM F152	MPa	11
<b>Stress resistance</b>	DIN 52913		
16 h, 50 MPa, 175 °C		MPa	38
16 h, 50 MPa, 300 °C		MPa	33
<b>Specific leak rate</b>	DIN 3535-6	mg/(s·m)	0.03
<b>Thickness increase</b>	ASTM F146		
Oil IRM 903, 5 h, 150 °C		%	3
ASTM Fuel B, 5 h, 23 °C		%	5
<b>Compression modulus</b>	DIN 28090-2		
At room temperature: $\epsilon_{KSW}$		%	6.9
At elevated temperature: $\epsilon_{WSW/200\text{ °C}}$		%	7.9
<b>Percentage creep relaxation</b>	DIN 28090-2		
At room temperature: $\epsilon_{KRW}$		%	3.3
At elevated temperature: $\epsilon_{WRW/200\text{ °C}}$		%	1.2
<b>Max. operating conditions</b>			
Peak temperature		°C/°F	440/824
Continuous temperature		°C/°F	350/662
- with steam		°C/°F	250/482
Pressure		bar/psi	120/1740

## P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

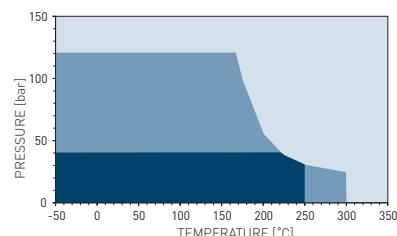

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.

Surface finish	Surface finish is 4AS. Optional graphite or PTFE finish on request.
Dimensions of standard sheets	Sheet size [mm]: 1500 x 1500   3000 x 1500   4500 x 1500 Thickness [mm]: 0.5   1.0   1.5   2.0   3.0 Other dimensions and thicknesses are available on request.
Tolerances	± 5 % on length and width On thickness up to 1.0 mm ± 0.1 mm On thickness above 1.0 mm ± 10 %


Acetamide	+
Acetic acid, 10%	+
Acetic acid, 100% (Glacial)	-
Acetone	?
Acetonitrile	-
Acetylene (gas)	+
Acid chlorides	-
Acrylic acid	?
Acrylonitrile	-
Adipic acid	+
Air (gas)	+
Alcohols	+
Aldehydes	?
Alum	+
Aluminium acetate	+
Aluminium chlorate	?
Aluminium chloride	?
Aluminium sulfate	?
Amines	-
Ammonia (gas)	?
Ammonium bicarbonate	+
Ammonium chloride	+
Ammonium hydroxide	+
Amyl acetate	?
Anhydrides	?
Aniline	-
Anisole	?
Argon (gas)	+
Asphalt	+
Barium chloride	+
Benzaldehyde	-
Benzene	+
Benzoic acid	?
Bio-diesel	+
Bio-ethanol	+
Black liquor	?
Borax	+
Boric acid	+
Butadiene (gas)	+
Butane (gas)	+
Butyl alcohol (Butanol)	+
Butyric acid	+
Calcium chloride	+
Calcium hydroxide	+
Carbon dioxide (gas)	+
Carbon monoxide (gas)	+
Cellosolve	?
Chlorine (gas)	-
Chlorine (in water)	-
Chlorobenzene	?
Chloroform	-
Chloroprene	?
Chlorosilanes	-
Chromic acid	-
Citric acid	?
Copper acetate	+
Copper sulfate	+
Creosote	?
Cresols (Cresylic acid)	-
Cyclohexane	+
Cyclohexanol	+
Cyclohexanone	?
Decalin	+
Dextrin	+
Dibenzyl ether	?
Dibutyl phthalate	?
Dimethylacetamide (DMA)	?
Dimethylformamide (DMF)	?

Dioxane	-
Diphyl (Dowtherm A)	+
Esters	?
Ethane (gas)	+
Ethers	?
Ethyl acetate	?
Ethyl alcohol (Ethanol)	+
Ethyl cellulose	?
Ethyl chloride (gas)	-
Ethylene (gas)	+
Ethylene glycol	+
Formaldehyde (Formalin)	?
Formamide	?
Formic acid, 10%	+
Formic acid, 85%	?
Formic acid, 100%	-
Freon-12 (R-12)	+
Freon-134a (R-134a)	+
Freon-22 (R-22)	?
Fruit juices	+
Fuel oil	+
Gasoline	+
Gelatin	+
Glycerine (Glycerol)	+
Glycols	+
Helium (gas)	+
Heptane	+
Hydraulic oil [Glycol based]	+
Hydraulic oil [Mineral type]	+
Hydrazine	-
Hydrocarbons	+
Hydrochloric acid, 10%	?
Hydrochloric acid, 37%	-
Hydrofluoric acid, 10%	-
Hydrofluoric acid, 48%	-
Hydrogen (gas)	+
Iron sulfate	+
Isobutane (gas)	+
Isooctane	+
Isoprene	+
Isopropyl alcohol (Isopropanol)	+
Kerosene	+
Ketones	?
Lactic acid	?
Lead acetate	+
Lead arsenate	+
Magnesium sulfate	+
Maleic acid	?
Malic acid	?
Methane (gas)	+
Methyl alcohol (Methanol)	+
Methyl chloride (gas)	?
Methylene dichloride	?
Methyl ethyl ketone (MEK)	?
N-Methyl-pyrrolidone (NMP)	?
Milk	+
Mineral oil (ASTM no.1)	+
Motor oil	+
Naphtha	+
Nitric acid, 10%	-
Nitric acid, 65%	-
Nitrogen (gas)	+
Nitrous gases (NOx)	?
Octane	+
Oils (Essential)	+
Oils (Vegetable)	+

Oleic acid	+
Oleum [Sulfuric acid, fuming]	-
Oxalic acid	?
Oxygen (gas)	-
Palmitic acid	+
Paraffin oil	+
Pentane	+
Perchloroethylene	-
Petroleum [Crude oil]	+
Phenol [Carbolic acid]	-
Phosphoric acid, 40%	?
Phosphoric acid, 85%	-
Phthalic acid	+
Potassium acetate	+
Potassium bicarbonate	+
Potassium carbonate	+
Potassium chloride	+
Potassium cyanide	+
Potassium dichromate	?
Potassium hydroxide	?
Potassium iodide	+
Potassium nitrate	+
Potassium permanganate	?
Propane (gas)	+
Propylene (gas)	+
Pyridine	-
Salicylic acid	?
Seawater/brine	+
Silicones [oil/grease]	+
Soaps	+
Sodium aluminate	+
Sodium bicarbonate	+
Sodium bisulfite	+
Sodium carbonate	+
Sodium chloride	+
Sodium cyanide	+
Sodium hydroxide	?
Sodium hypochlorite [Bleach]	?
Sodium silicate [Water glass]	+
Sodium sulfate	+
Sodium sulfide	+
Starch	+
Steam	+
Stearic acid	+
Styrene	?
Sugars	+
Sulfur	?
Sulfur dioxide (gas)	?
Sulfuric acid, 20%	-
Sulfuric acid, 98%	-
Sulfuryl chloride	-
Tar	+
Tartaric acid	?
Tetrahydrofuran (THF)	-
Titanium tetrachloride	-
Toluene	+
2,4-Toluenediisocyanate	?
Transformer oil [Mineral type]	+
Trichloroethylene	-
Vinegar	+
Vinyl chloride (gas)	-
Vinylidene chloride	-
Water	+
White spirits	+
Xlenes	+
Xlenol	-
Zinc sulfate	+

## σ<sub>BO</sub> DIAGRAM

DIN 28090-1

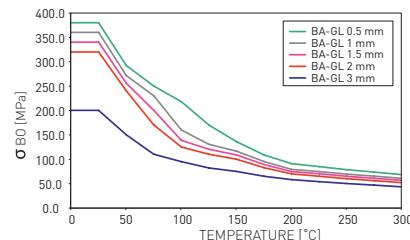

σ<sub>BO</sub> diagrams represents σ<sub>BO</sub> values for different gasket material thicknesses. These values indicate the maximum in-service compressive pressures which can be applied on the compressed gasket area in-service without destroying damaging the gasket material.

**P-T diagrams** indicate the maximum allowed combination of internal pressure and service temperature which can be applied simultaneously for a given gasket depending on its material type, thickness, size and tightness class. Given the variety of gasket applications and service conditions, these values should only be regarded as guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

## CHEMICAL RESISTANCE CHART

The recommendations made here are intended to be a guideline for the selection of the suitable gasket quality. Because the function and durability of the products depend upon a number of factors, the data may not be used to support any warranty claims.

⊕ Recommended

⊕ Recommendation depends on operating conditions

- Not recommended



DONIT TESNIT®, d.o.o.

Cesta komandanta Staneta 38  
1215 Medvode, Slovenia

Phone: +386 (0)1 582 33 00

Fax: +386 (0)1 582 32 06

+386 (0)1 582 32 08

Web: www.donit.eu

E-mail: info@donit.eu

Copyright © 2015 DONIT TESNIT, d.o.o.

All rights reserved

Date of issue: 11.04.2016 / TDS-BAGL-05-2015